




5-1000MHz室内型分支分配器

MW-□7□H

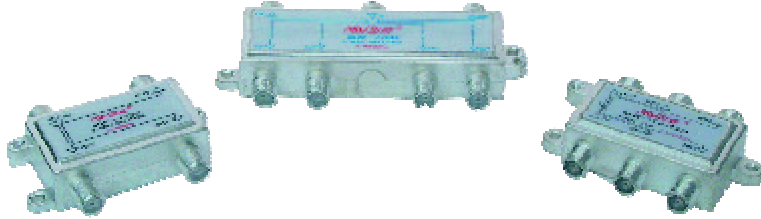

技术指标

项 目		单位	性能参数																							
			一分支器 (171- □□H)								二分支器 (172- □□H)								三分支器 (173- □□H)							
分支损耗	标称值		8	10	12	14	16	18	20	24	8	10	12	14	16	18	20	22	10	12	14	16	18	20	22	24
	允许偏差	dB	±1.5								±1.5								±1.5							
插入损耗 (≤)	5-65MHz	dB	2.5	2.2	2.0	1.8	1.7	1.5	1.2	1.0	4.0	3.3	2.5	2.3	2.0	2.0	1.7	1.7	4.0	3.2	2.5	1.8	1.5	1.2	1.0	1.0
	65-550MHz		2.0	1.8	1.5	1.3	1.2	1.0	0.7	0.5	4.0	3.3	2.5	2.3	2.0	2.0	1.2	1.2	4.0	3.5	2.7	2.0	1.8	1.5	1.2	1.2
	550-750MHz		2.2	2.0	1.8	1.6	1.5	1.5	1.5	1.0	4.5	3.7	2.9	2.7	2.5	2.5	2.0	2.0	4.5	3.5	2.7	2.0	1.8	1.5	1.2	1.2
	750-1000MHz		2.5	2.2	2.0	2.0	1.8	1.8	1.8	2.0	4.5	3.7	2.9	2.7	2.5	2.5	2.0	2.0	4.5	3.8	3.0	2.5	2.0	1.8	1.5	1.5
反射隔离 (≥)	5-65MHz	dB	20	22	22	24	26	28	30	30	22	22	22	26	26	26	30	30	23	25	27	29	30	30	30	30
	65-550MHz		22	22	22	24	26	28	30	30	22	22	22	26	26	26	30	30	23	23	23	27	28	28	28	28
	550-750MHz		22	22	22	22	26	28	30	30	20	20	20	22	22	26	28	28	23	23	23	27	28	28	28	30
	750-1000MHz		20	20	20	22	24	28	26	26	20	20	20	22	22	24	24	24	21	21	21	25	25	25	25	25
相互隔离 (≥)	5-65MHz	dB									20								25							
	65-550MHz										30								28							
	550-750MHz										26								25							
	750-1000MHz										22								22							
反射损耗 (≥)	5-65MHz	dB	14								14								14							
	65-550MHz		16								16								16							
	550-750MHz		14								14								14							
	750-1000MHz		14								14								14							
屏蔽衰减		dB	≥ 100								≥ 100								≥ 100							

项 目		单位	性能参数																							
			四分支器（174 - □□H）								六分支器（176 - □□H）								八分支器（178 - □□H）							
分支损耗	标称值		10	12	14	16	18	20	24	12	14	16	18	20	22	24	26	14	16	18	20	22	24	26	28	
	允许偏差	d B	±1.5								± 1.5								±1.5							
	5-750MHz		±2.5								± 2.5								±2.5							
插入损耗 (≤)	5-65MHz	dB	4.0	4.0	3.5	2.5	2.3	2.0	1.5	4.0	4.0	3.0	2.5	2.0	1.5	1.3	1.3	4.0	4.0	2.5	2.0	1.5	1.5	1.2	1.0	
	65-550MHz		4.0	4.0	3.5	2.5	2.3	2.0	1.0	4.0	4.0	3.5	3.0	2.5	1.5	1.3	1.3	4.0	4.0	3.0	2.5	1.5	1.5	1.2	1.5	
	550-750MHz		4.3	4.3	4.0	2.8	2.5	2.5	1.8	4.5	4.5	4.0	3.5	3.0	1.5	1.5	1.5	4.5	4.5	3.5	3.0	2.0	1.5	1.5	1.5	
	750-1000MHz		4.5	4.5	4.0	3.0	3.0	2.8	2.0	5.0	5.0	4.5	4.0	3.5	1.5	1.5	1.5	5.0	5.0	4.0	3.5	2.5	1.8	1.5	1.5	
反射隔离 (≥)	5-65MHz	dB	22	22	24	30	30	30	34	22	24	26	28	30	30	30	32	24	30	30	30	32	34	36	36	
	65-550MHz		22	22	24	30	30	30	34	22	24	26	28	30	30	30	32	24	30	30	30	32	34	36	36	
	550-750MHz		22	22	24	26	26	30	34	20	22	24	26	26	26	26	28	22	26	28	30	32	34	36	36	
	750-1000MHz		20	20	22	24	24	26	26	20	22	24	26	26	26	26	28	20	24	26	26	26	26	28	28	

相互隔离 (≥)	5-65MHz	dB	20	20	20	22	22	22	22	25	25	25	25	25	25	25	25	25		
	65-550MHz		23	25	25	30	30	30	30	25	25	25	25	25	25	25	25	25		
	550-750MHz		18	20	20	25	25	25	25	20	20	22	22	22	22	22	22	22		
	750-1000MHz		18	20	20	22	22	22	22	18	18	20	20	20	20	20	20	20		
反射损耗 (≥)	5-65MHz	dB	14								14								14	
	65-550MHz		16								16								16	
	550-750MHz		14								14								14	
	750-1000MHz		14								14								14	
屏蔽衰减		dB	≥ 100								≥ 100								≥ 100	

项 目			单 位	性能参数											
				十二分支器（1712 - □□H）						十六分支器（1716 - □□H）					
分支损耗	标称值			18	20	22	24	26	28	18	20	22	24	26	28
	允许偏差	5-750MHz	dB	±1.5						±1.5					
		750-1000MHz		±3.0						±3.0					
插入损耗 （≤） 反向隔离 （≥）	5-65MHz		dB	4.0	4.0	3.0	2.5	2.0	1.5	4.0	4.0	4.0	4.0	4.0	4.0
	65-550MHz			4.0	4.0	3.0	2.5	2.0	1.5	4.0	4.0	4.0	4.0	4.0	4.0
	550-750MHz			4.5	4.5	3.0	2.5	2.0	1.5	4.5	4.5	4.0	4.0	4.0	4.0
	750-1000MHz			4.5	4.5	3.5	3.0	2.5	2.0	4.5	4.5	4.5	4.5	4.5	4.5
	5-65MHz		dB	3.0	3.0	3.2	3.4	3.6	3.6	3.0	3.0	3.2	3.4	3.6	3.6
	65-550MHz			3.0	3.0	3.2	3.4	3.6	3.6	3.0	3.0	3.2	3.4	3.6	3.6
	550-750MHz			2.8	3.0	3.2	3.4	3.6	3.6	2.8	3.0	3.2	3.4	3.6	3.6
	750-1000MHz			2.6	2.6	2.6	2.8	2.8	2.8	2.6	2.6	2.6	2.8	2.8	2.8
相互隔离 （≥）	5-65MHz		dB	2.4						2.4					
	65-550MHz			2.5						2.5					
	550-750MHz			2.3						2.3					
	750-1000MHz			2.0						2.0					
反射损耗 （≥）	5-65MHz		dB	1.4						1.4					
	65-550MHz			1.6						1.6					
	550-750MHz			1.4						1.4					
	750-1000MHz			1.4						1.4					
屏蔽衰减			dB	≥100						≥100					

分配器 (77口H)

测试项目		772H(S)	773H(S)	774H(S)	772H	773H	774H	776H	778H	7712H	7716H
分配损耗 dB (≤)	5-65MHz	4.2	6.5	8.0	4.2	6.3	8.0	9.3	10.5	12.5	14.5
	65-550MHz	3.7	5.8	7.5	3.7	5.8	7.5	9.8	10.5	12.5	14.5
	550-750MHz	4.0	6.5	8.0	4.0	6.5	8.0	10.5	11.5	13.0	15.0
	750-1000MHz	4.5	7.5	8.5	4.5	7.0	8.5	10.5	12.0	13.0	16.0
相互隔离 dB (≥)	5-65MHz	22			25						
	65-550MHz	25			25						
	550-750MHz	18			25						
	750-1000MHz	18			22						
反射损耗 dB (≥)	5-65MHz	12			16						
	65-550MHz	16			16						
	550-750MHz	14			14						
	750-1000MHz	12			14						
屏蔽衰减 dB		≥100			≥100						